

TAG-200

**TWO-AXIS
GYROSCOPE**

TAG-300

**THREE-AXIS
GYROSCOPE**




The **Inertial Labs TAG-200** and **TAG-300** are Two-axis and Three-axis Gyroscopes, developed for Electro-Optical Systems, Gimbals, Line-Of-Site and Pan & Tilt Platforms for stabilization and pointing applications. **TAG-200** and **TAG-300** utilize advanced performance, tactical-grade MEMS sensitive elements, of which size, power consumption, reliability and performance are ideal for accomplishing complex tasks requiring accurate stabilization of assorted platforms. Robust technology with proven reliability in the field, Inertial Labs Gyroscope solutions consistently deliver performance in all environments.

Developed for use in particularly harsh environments, the **TAG-200** and **TAG-300** gyroscopes can withstand extreme shock and vibration in accordance with MIL-STD-810 ground mobile use. Additionally, they are fully digitized (RS-232 or RS-422 interfaces), include Built-In-Test (BIT) functionalities and have no moving parts. Key advantages of the Inertial Labs Dual **TAG-200** & Triple **TAG-300** axis Gyroscopes:



- Low Noise
- Low Latency
- Wide Bandwidth
- High Data Rate
- Low Bias Drift
- Low VRE
- High MTBF
- Affordable Price
- ITAR-free

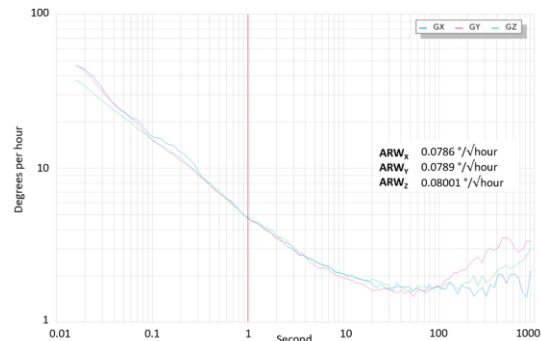

Both **TAG-200** and **TAG-300** are factory calibrated over operational temperature range with very low non-orthogonality and misalignment between sensitive elements, QA/QC tested and supplied with individual Calibration and Acceptance Test Certificates.









Performance Specifications

Parameter	Units	Value
Output signals		Angular rates, Temperature, Synchronization output
Available colors of enclosure		Black, Desert Tan or Green
Data update rate	Hz	2000 Hz
Start-up time	sec	< 1
Performance		
Number of Axis		Two (TAG-200/200-11); Three (TAG-300/300-11)
Measurement range	deg/sec	±450; ±950; ±2000
Bandwidth (-3dB)	Hz	260
Data update rate	Hz	2000
Bias in-run stability (Allan Variance, RMS)	deg/hr	2
Bias repeatability (turn-on to turn-on, RMS)	deg/hr	20
Bias instability (over temperature range, RMS)	deg/hr	35
SF accuracy (over temperature range)	ppm	3000
Noise. Angular Random Walk (ARW)	deg/√hr	0.08
Non-linearity	ppm	200
Axis misalignment	mrad	0.15
Environment		
Mechanical shock (MIL-STD-810G)	g	1500
Vibration (MIL-STD-810G)	g, Hz	7, 5 – 2000
Operating temperature	deg C	-40 to +85
Storage temperature	deg C	-50 to +90
MTBF (GM @+65degC, operational)	hours	100,000
Sealing		IP-67 (TAG-200/300); IP-65 (TAG-200-11/300-11)
Electrical		
Supply voltage	V DC	5 to 30 (TAG-200/300); 4 (TAG-200-11/300-11)
Power consumption	Watts	0.8 @ 5V (TAG-200/300); 0.4 @ 4V (TAG-200-11/300-11)
Output Interface	-	RS-422/RS-232 (TAG-200/300); RS-422 (TAG-200-11/300-11)
Output data format	-	Binary, ASCII characters, STIM output format
EMC/EMI/ESD		MIL-STD-461G
Mechanical		
		TAG-200 / TAG-300 TAG-200-11 / TAG-300-11
Size	mm	39 x 45 x 22 26 x 19 x 10
Weight	grams	70 10





Part Number:	TAG-200	-	G450	-	C1	-	B	-	V1S.	1
	TAG-300		G950		C2		G			2
	TAG-200-11		G2000				D			12
	TAG-300-11									

Model	TAG-200	Two Axis Gyroscopes (IP-67 sealed version)
	TAG-300	Three Axis Gyroscopes (IP-67 sealed version)
	TAG-200-11	Two Axis Gyroscopes (IP-65 sealed version)
	TAG-300-11	Three Axis Gyroscopes (IP-65 sealed version)
Gyroscopes measurement range	G450	±450 deg/sec measurement range
	G950	±950 deg/sec measurement range
	G2000	±2000 deg/sec measurement range
Enclosure	C1	Aluminum Enclosure (IP-67), for TAG-200 and TAG-300
	C2	Aluminum Enclosure (IP-65), for TAG-200-11 and TAG-300-11
Color of enclosure	B	Black (default)
	G	Green
	D	Desert tan
Grade	V1S.	Tactical grade. Stabilization S: stabilization & pointing
Interface	1	RS-232 (TAG-200 and TAG-300)
	2	RS-422 (TAG-200/TAG-200-11 and TAG-300/TAG-300-11)
	12	RS-232 and RS-422 (TAG-200 and TAG-300)

TAG-200 Dimensional Drawing

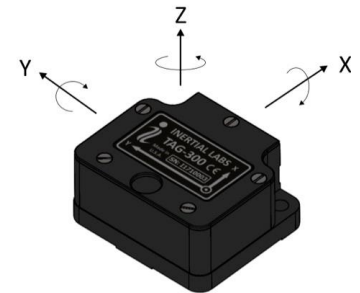


TAG-200-11 and TAG-300-11 Dimensional Drawing



Outline dimensions

Center of inertia

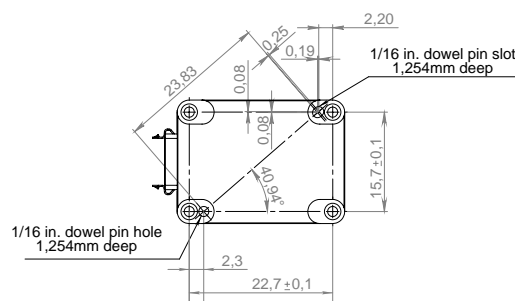

Mounting holes

All Dimensions for all drawings are in millimeters.